

DP No /2025


File No C2/1685/2025

Ref. No TS-IPASS

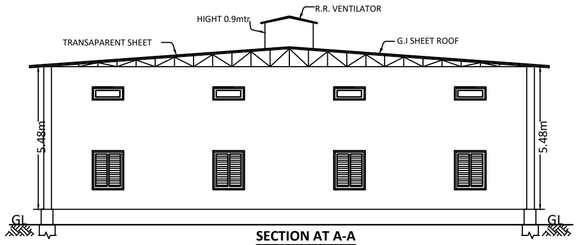

SECTION AT A-A

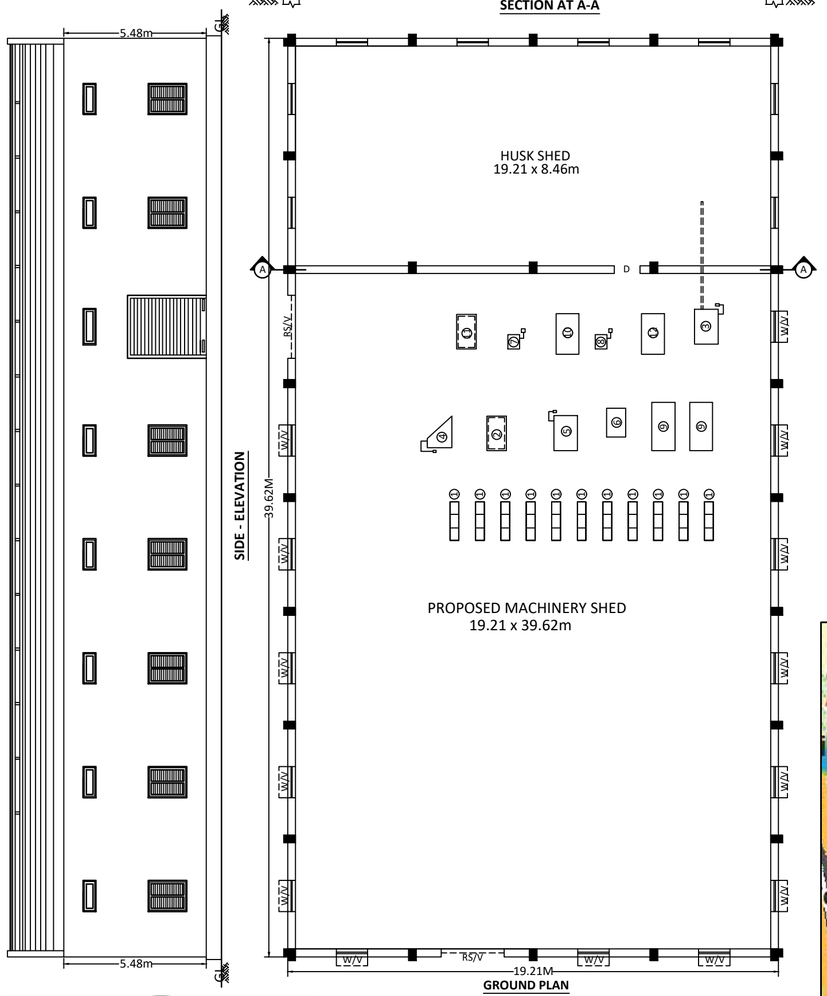

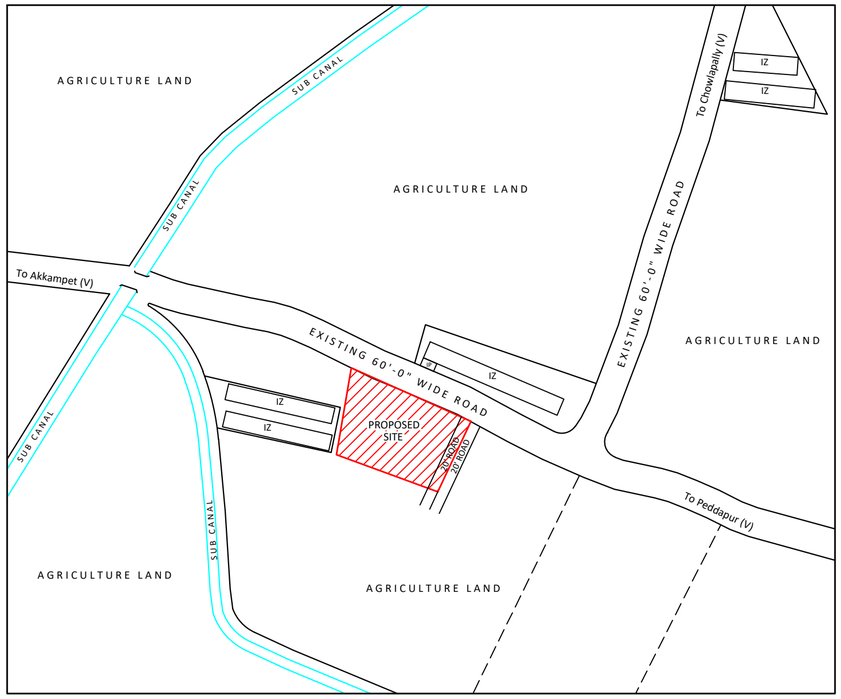


PLAN SHOWING THE EXISTING TOPO DETIALS OF ITS APPLICANT SITE SITUATED AT AGRAMPAHAD (V), ATMAKUR (M), HANUMAKONDA DIST.

SCALE : 1'-100'-0"

SITE UNDER REFERENCE :

EXISTING ROADS :

CANAL :

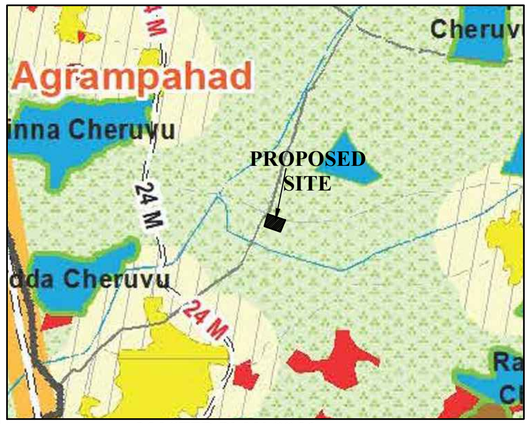


MASTER PLAN 2041



Google Cordinates : 18.025384, 79.701926

18°01'31.4"N 79°42'06.9"E



EXTRACT TO THE PART SY.NOS OF AGRAMPAHAD (V) ATMAKUR (M), HANUMAKONDA DIST.


SCALE : 1 " - 400'-0"

SITE UNDER REFERENCE :

REFERENCE :


EXISTING ROADS :

MASTER PLAN ROADS :

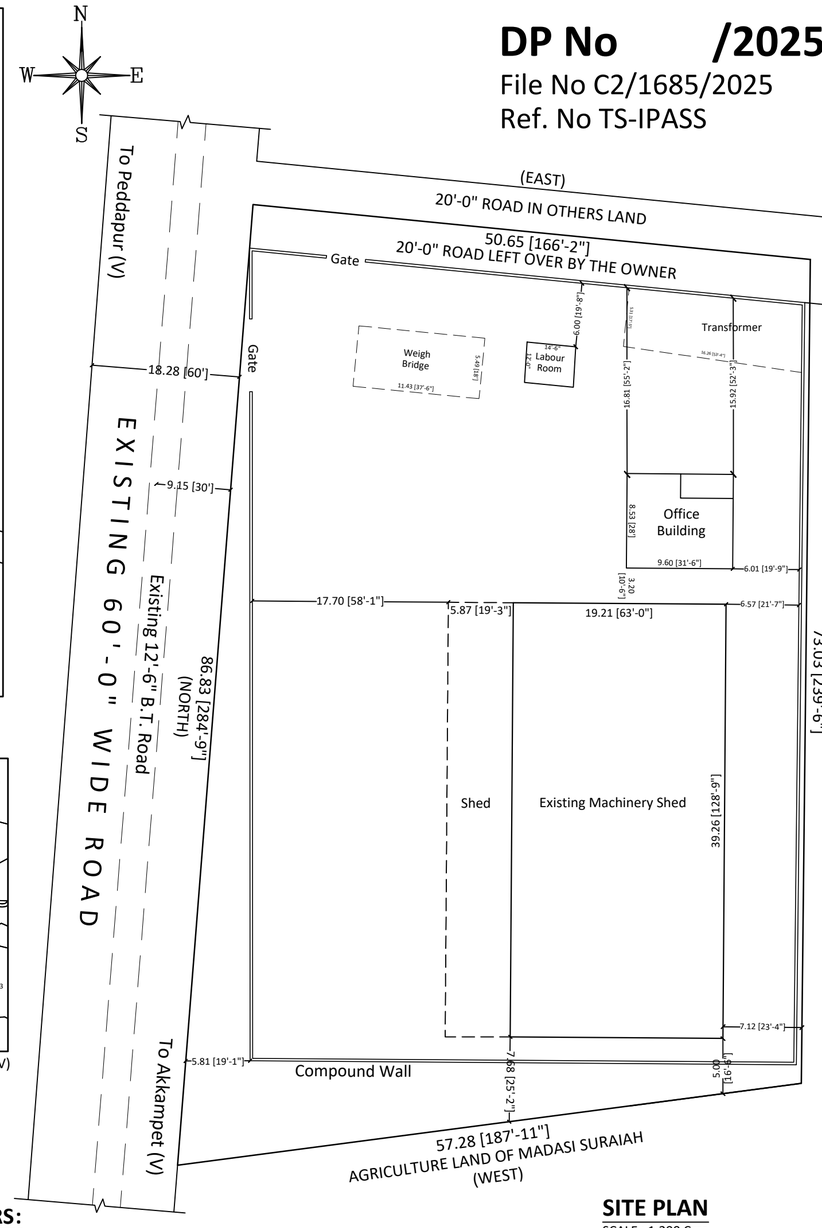

SITE PLAN

SCALE : 1:200 Cms



S.No.	SPECIFICATION OF RICE MILL HALL CIVIL CONSTRUCTION	
1.	EARTH WORK EXCAVATION FOR FOUNDATION	AS PER DRAWING
2.	SAND BED	0.1 M THICK0.9 X 0.15 M
3.	CEMENT CONCRETE 1:6:10	TO LEVEL THE FOUNDATION AND FOR HOT SURFACE 0.1 M THICK
4.	R.C.C PLINTH BEAM 1:2:4	0.23 M X 0.35 M
5.	FLORING WITH 20 MM METAL	1:2:4 C.C
6.	SUPER STRUCTURE WITH BRICK MASONARY	CEMENT MORTOR 1:6 C.C
7.	WALLS & TIE BEAMS	AS SHOWN INTHE DRAWING
8.	GROUND FLOOR FOR MACHINARY INSTALETION OF MACHINARY	0.20 M THICK R.C.C 1:2:4 C.C
9.	IRON WINDOWS ROLLING SHUTTERS	SHOWN INTHE DRAWING
10.	ROOFING	G.I SHEET 0.6 MM THICK SUPPORTED WITH TAPER TUBLER TRUSSES TRANSPERENT SHEET
11.	WOODEN DOORS & WINDOWS	PROVIDED FOR ROOMS
12.	RIDGE ROF VENTILATION	PROVIDED FOR VENTILATION OVER THE MACHINARY

S.No.	MACHINERY SCHEDULE DESCRIPTION	Nos.	HPs
1	GRAIN DISCHARGED (ELEVATORS)	11	11.0
2	PRE CLEANER MAX MFD	1	3.0
3	PADDY CLEANER	1	3.0
4	PNEVMATIC HUSKER	1	10.0
5	HUSK ASPIRATOR MFD	1	3.0
6	PADDY SEPERATOR DLX - 9TRAY	1	2.0
7	MEGA WHITENER VERTEX MAX	1	25.0
8	RICE GLAZER SMART (MODIFIED)	1	20.0
9	SHIFTER (EACH 2HP)	2	4.0
10	BRAN BLOWER (ALI)	1	10.0
11	BRAN RTR & GEARED MOTOR	1	1.0
12	BRAN PROCESS SYSTEM	1	2.0
13	BORE & OTHERS ELECTRICAL		5.0
	TOTAL HP		99.0

SCHEDULE OF JOINERY	
RS: ROLLING SHUTTER	2.43 X 3.05 M
D: DOOR	1.21 X 2.13 M
W: WINDOW	1.21 X 1.52 M
V: VENTILATOR	1.21 X 0.45 M

SITE PLAN AREA PARTICULARS:

TOTAL SITE AREA	:	**4350.22 Sq.Mts (1Ac-03Gts)**
Plinth Area of Machine Hall	:	754.18 Sq Mts
Plinth Area of Machinery Shed	:	230.45 Sq Mts
Plinth Area Office Building	:	82.23 Sq Mts
Labour Room Area	:	16.22 Sq Mts
Weigh Bridge	:	62.93 Sq Mts
Total Plinth Area	:	**1146.01 Sq Mts**
Total Open Area	:	3198.08 Sq Mts
Parking Area **(23%)**	:	265.00 Sq Mts

Green Belt Area (33%) 4350.22 x 33/100 = 1435.57 Sq.Mts

R.W.H.P 1146.01X6/100 = 68.76 Cum Mts

(1.2m X 1.50M X38.20M)

K A K A T I Y A U R B A N D E V E L O P M E N T A U T H O R I T Y, W A R A N G A L .

PLAN SHOWING THE PROPOSED CONSTRUCTION OF **"M/s MAHADEVA INDUSTRIES"** IN Sy.No. 123/B/1 OF AGRAMPAHAD (V), ATMAKUR (M), HANUMAKONDA District. **Propreiter :- Smt KAILASA MANASA W/o RAJU**

A. Z. ASSOCIATES
PLANNERS & ENGINEERS
L.No.9104-C-205 Dated 30-09-1995
NEAR THOUSAND PILLARS TEMPLE
HNK.WARANGAL RURAL DIST.
PHONE : 9390111925,9985433514

K Manasa

APPLICANT'S SIGNATURE

VICE CHAIRMAN, KUDA

CHIEF PLANNING OFFICER

Asst. PLANNING OFFICER

Jr. PLANNING OFFICER