GOVERNMENT OF TELANGANA
GROUNDWATER DEPARTMENT
RANGAREDDY DISTRICT
FORM-6

NO OBJECTION CERTIFICATE (NOC) FOR GROUND WATER EXTRACTION UNDER TGWALTA.

Firm/Industry Name:	:	**M/s ARSEN & TOUBRO LIMITED - RADIAL ROAD PROJECT RMC PLANT.**
Address:	:	Kurmidda (V), Yacharam (M), Rangareddy.
Communication Address:	:	Kurmidda (V), Yacharam (M), Rangareddy.

1.	NOC No.:	**RRD/TGIPASS/MIC0060037145480 /IND/NOC/2025-26/13**			
2.	Application No.:	**MIC0060037145480**	3.	Category of Watershed as per GEC (2024-25)	**Safe**
4.	Firm/Industry BW Status:	**Proposed**	5.	NOC Type:	**Proposed**
6.	Valid from:	**26.02.2026**	7.	Valid up to:	**25.02.2029**

8. Ground Water Abstraction Permitted:

Fresh Water	Saline Water		Dewatering		Total
m^3/day	m^3/day	m^3/year	m^3/day	m^3/year	m^3/Year
20	–	–	–	–	**7300**

9. Details of Ground water Extraction /Dewatering structures

Total No of Bore wells Proposed: 01

Extraction Structures	**Bore wells**
Year of Drilling	**2026**
Dia/Depth of well/HP	**1)165mm/120m/5 HP 2**
Purpose of Use	**Industrial Purpose**

10. Details of Rain Water Harvesting Structure/Artificial Recharge Structure.

Recharge Structures	**Existing Structures**	**Recommended Structures**
	0	**1 ARS**

11.	Application fee paid in TG-iPass Web Portal		Rs: **-14500/-**		
12.	Number of Piezometers (Observation wells) to be Constructed/ Monitored & Monitoring mechanism.	No. of Piezometers	Monitoring Mechanism		
			Manual	DWLR**	DWLR With Telemetry
	**DWLR - Digital Water Level Recorder	-	-	-	-

(Compliance Conditions given overleaf)

Place: Kongarakalan
Date: **26.02.2026**

Designated Officer
District Ground Water Officer
GWD, Rangareddy District.
(With Seal)

26/02/26
District Ground Water Officer
Ground Water Department
Rangareddy District

Validity of this NOC shall be subject to compliance of the following Conditio

Mandatory Conditions:

1. Installation of tamper proof digital water flow meter on all the abstraction structure(s) is mandatory and intimation regarding the installation should be communicated to the Ground Water Department, Rangareddy District within **30 days** of grant of NOC.
2. The Firm must get water flow meter calibrated from an authorized agency once in a year.
3. The Firm should monitor quality of groundwater from the abstraction structure(s) twice in a year during May & November. The samples must be analyzed in NABL accredited laboratories for basic parameters. Additionally for heavy metals, organic compounds in case of potential polluting industries, water quality data shall be submit to respective office of the District Groundwater Officer, GWD, Rangareddy District.
4. Construction of Artificial Recharge/Rain Water Harvesting Structures (Rule-17, TSWALTA) shall be mandatory.
5. The firm shall report compliance of the NOC conditions to respective office of the District Groundwater Officer, GWD, Rangareddy District within one year from the date of issue of this NOC.
6. Application for renewal can be submitted to office of the District Ground Water Officer, GWD, Rangareddy District from 90 days before the expiry of NOC. Ground water withdrawal ,if any after expiry of NOC shall be illegal &liable for legal action as per provisions of TSWALTA &Environment (Protection) Act, 1986.
7. This NOC is subject to prevailing Central/State Government rules/laws/norms or Court orders related to construction of tube well/ground water abstraction structure / recharge or conservation structure/discharge of effluents or any such matter as applicable.

General conditions:

- No additional ground water abstraction and/or de-watering structures shall be constructed for any purpose without prior approval of the Ground Water Department.
- The proponent shall seek prior permission from Ground Water Department for any increase in quantum of groundwater abstraction (more than that permitted in NOC for specific period).
- The project proponent shall take all necessary measures to prevent contamination of ground water in the premises failing which the firm shall be responsible for any consequences arising the reupon.
- In case of industries that are likely to contaminate the ground water, no recharge measures shall be taken up by the firm inside the plant premises. The runoff generated from the rooftop shall be stored and put to beneficial use by the firm.
- Wherever feasible, requirement of water for greenbelt (horticulture) shall be met from recycled / treated waste water.
- In case of violation of any NOC conditions, the applicant shall be liable to pay the penalties as per Rule- 27, TSWALTA.
- This NOC does not absolve the proponents of their obligation / requirement to obtain other statutory and administrative clearances from appropriate authorities.
- In case of change of ownership, new owner of the industry will have to apply for incorporation of necessary changes in the **No Objection Certificate** with documentary proof within 60days of possession of the premises.
- Proponents, who have installed/constructed artificial recharge structures should maintain properly by desiltation and cleaning.
- This NOC is being issued without any prejudice to the directions of the Hon'ble NGT/court orders in cases related to ground water or any other related matters.

(Non-compliance of the conditions mentioned above is likely to result in the cancellation of NOC and legal action against the proponent).

GOVERNMENT OF TELANGANA

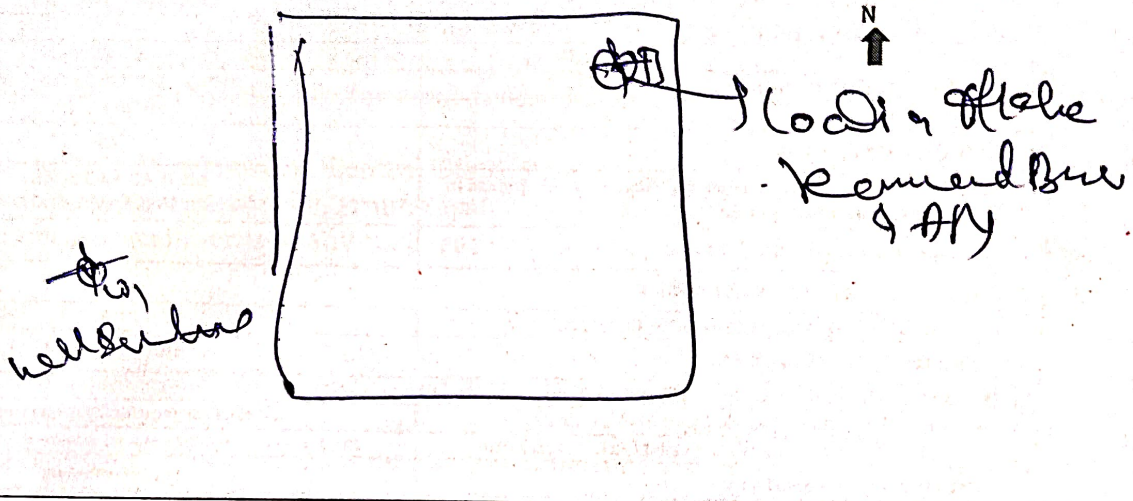
GROUND WATER DEPARTMENT, RANGAREDDY DISTRICT

REPORT ON FEASIBILITY OF GROUND WATER UNDER "TSGWER-2023" and TGIPASS

I.	GENERAL								
1	Investigation Conducted by					P.YUGENDHAR REDDY Asst.Hydrogeologist			
2	Date and duration of Investigation					24.02.2026			
3	Name of the Beneficiary/Organization					M/s. RISEN & TOUBRO LIMITED -RADIAL ROAD PROJECT RMC PLANT.			
4	Purpose of Investigation & Requirement of Water					Industrial & 40 KLD			
5	LOCATION:								
	Village					Kurmidda			
	Mandal					Yacharam			
	District					Rangareddy			
	Survey No. & Extent					Sy.NO NA (P) 0.60 ACRES			
	Co ordinates					16.991337, 78.556812			
II	PHYSIOGRAPHY & DRAINAGE								
1	Topography					Undulating			
2	Soil Type and Thickness					Red Sandy Soils , 1.5 to 2 m			
3	Drainage Pattern					Sub Dendritic			
4	Elevation [MSL] in m.					525			
5	Sub basin name, Categorization and stage of development in the basin GEC Status as per 2024-25					RR_D_47_Yacharam ; Safe with 59% Stage of Extraction			
6	Average Annual Rainfall in mm					692/849 mm			
7	Proximity to surface water bodies					NA			
8	Stream/River/[specify the name: influent/effluent]					NA			
9	Command / Non Command					Non Command			
III	HYDROGEOLOGICAL CONDITIONS								
1	Geology of the Area [Rock Type and Texture]					Archean Granites with Coarse grained texture			
2	Average Thickness of Weathered/ Saturated Zone					10-15 m weathred /18-35 m semi-weathred/Fractured 40-75 m.			
3	Structural Controls if any					Fractures Present			
4	Depth range of wells in the area (m)	Dug Well				NA			
		Bore Well				100-120 m(Reported)			
5	Yield range of wells (lph)	Dug Well				NA			
		Bore Well				6000-8000 lph			
6	Approximate Aquifer Depths (Below Ground Level)					35m & 70m			
7	Location of nearest piezometer, DTWL/SWL in the piezometer well and water level trend					Nandiwanaparthy Piezometer, 5.58 m Jan 2026			
IV	HYDROGEOLOGICAL EVIDENCE								

Sl. No	Type of well	Name of the Owner	Survey No.	Depth [m] //Dia [mm]	SWL [m] bgl	Mode of lift / HP	Yield [lph] / Hours of pumping	Crops Irrigated [Acs]	Remarks
								Kharif / Rabi	
1	BW	thanda	na	110/16S	NA	SHP	6,500	paddy	Reported Information

V	RESULTS OF GEOPHYSICAL INVESTIGATIONS	
	Site selected on hydrogeological basis.	
VI	Quality of Ground Water & Suitability	Suitable after proper Treatment and Purification
VII	Suggestions for Improve Recharge To Ground Water	Recommended to construct 1 No. Rain Water Harvesting Structure

VIII	CONCLUSIONS AND RECOMMENDATIONS					
1	Justification for Recommending/Rejecting the Site*			Based on Hydrogeological investigations conditions, the investigated area is having good recharge conditions and minor fractures developed. based on the field conditions a new bore well is fesable for ground water extraction . Hence a new bore well is recommonded for ground water extraction.		
2	Type of Well	Borewells	Dia [mm]	165 mm	Depth	120 m
3	Location of recommended site with reference to permanent land mark			The Location of the proposed bore well 16.991337, 78.556812		
4	Distance of Nearest Well[m]			> 150 m		
5	Yield [lph]			5000 lph		
6	Distance from Nearest PWS Bore well or Dug well			No PWS Well present in and around the area.		
7	*Location Map of the Area* 					
8	Date of Submission of Report			26.02.2026		

Assistant HYUDROGEOLOGIST

// Approved by //

DISTRICT GROUNDWATER OFFICER
RANGAREDDY DISTRICT

District Ground Water Offiser
Ground Water Department
Rangareddy District